

CEMB[®] USA



SM628BPS

Professional grade swing arm tire changers for OEM and oversized tires and custom wheel applications. Features an optional high-performance Bead Press System (BPS) which is highly recommended to easily aid in the servicing of low-profile, run flat, on/off road tires and commercial light trucks with stiff sidewalls and difficult rims with deep drop centers.

SM628BPS

Table Top Clamping


Two Stage Inflation

High Torque Motor

Bead Breaker Shovel

Bead Pressing System (BPS)

Polymer Mounting Head

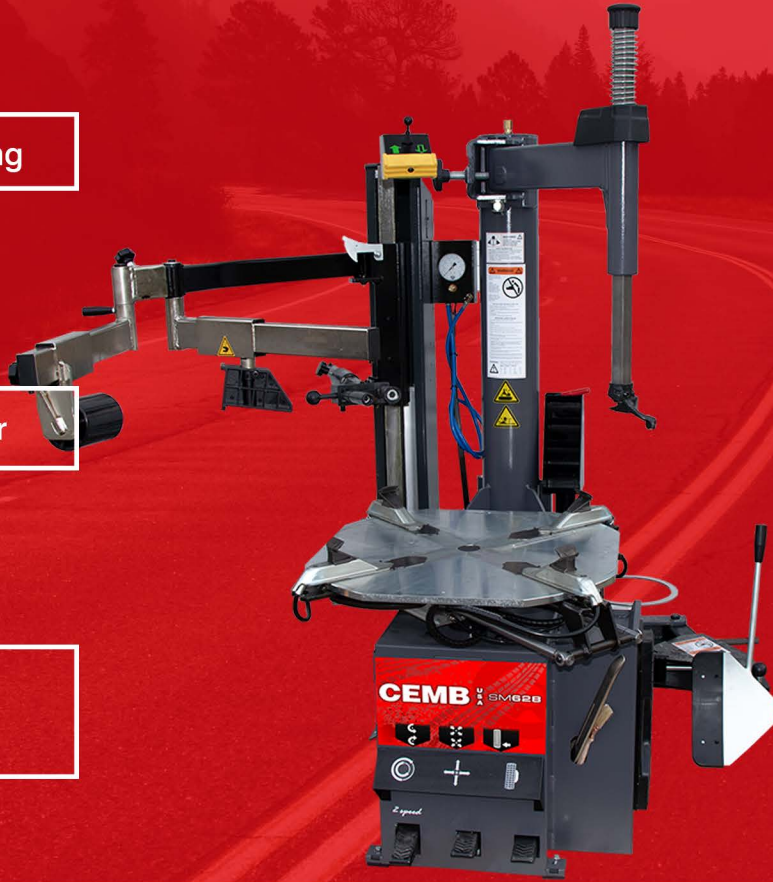

Standard Accessories



Bead Lifting Lever
511242



Bead Lifting Lever Cover
C00A000017



Clamp Extensions
100012100



Clamp Cover
Z3317931



Nylon Mount Head w/ Hardware
Z8-11600193



Nylon Mount Head
YCQ3007801



Centering Cone Extension
Z063903100



Centering Cones
A: Z067901600
B: Z3-90295



Hand Free Clamp
0604065



Bead Breaker Cover
Z456887A




Front Insert
Z63905900



Rear Demount Head Insert
Z063906300

DIMENSIONS

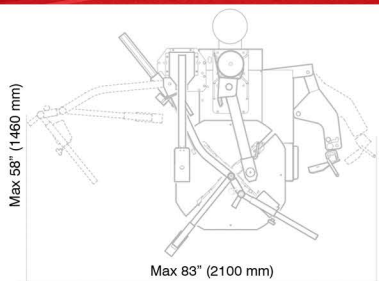

Power Supply: 220V, 1ph, L6-20P
Air Pressure: 145 psi (10 bar)
Rim Diameter (Ext.): 12" - 26"
Tire Diameter: 44" (1118 mm)
Max. Wheel Width: 16" (406 mm)
Turn Table Speed: 8-15 rpm
Shipping Weight: 630 lbs (286 Kg)

CONTACT

CEMB ^{USA}

CEMB USA - BL Systems Inc.
 2873 Ramsey Road, Gainesville, GA 30501
 (678) 717-1050 - sales@cemb-usa.com
 www.cemb-usa.com